


Motor

Motor execution	Submersible motor-10"-50°C	Speed	1/min	3500
Motor type	10MX-22000-XP	Power factor		0.87
Frame size	10 Inch	Efficiency		88 %
Rated voltage	575 V	Motor cable		7 m 6 rd 1x50 + 1 rd 1x25 (PE)
Starting mode	open for DOL, star delta and inverter	Cooling flow		1.00 m/s
Frequency	60 Hz	Degree of protection		IP 68
Rated power	kW 220 SF 1.15	Installation length L	mm	2183
Rated current	A 303	Weight	kg	482

Materials

Motor casing	Stainless steel / 1.4571
Shaft	Stainless steel / 1.4462
Radial bearing	carbon
Axial bearing	carbon
Winding wire	PE2/PA
Mechanical seal	SiC / SiC
Connection flange	Stainless steel / 1.4408
Fasteners	Stainless steel / 1.4401

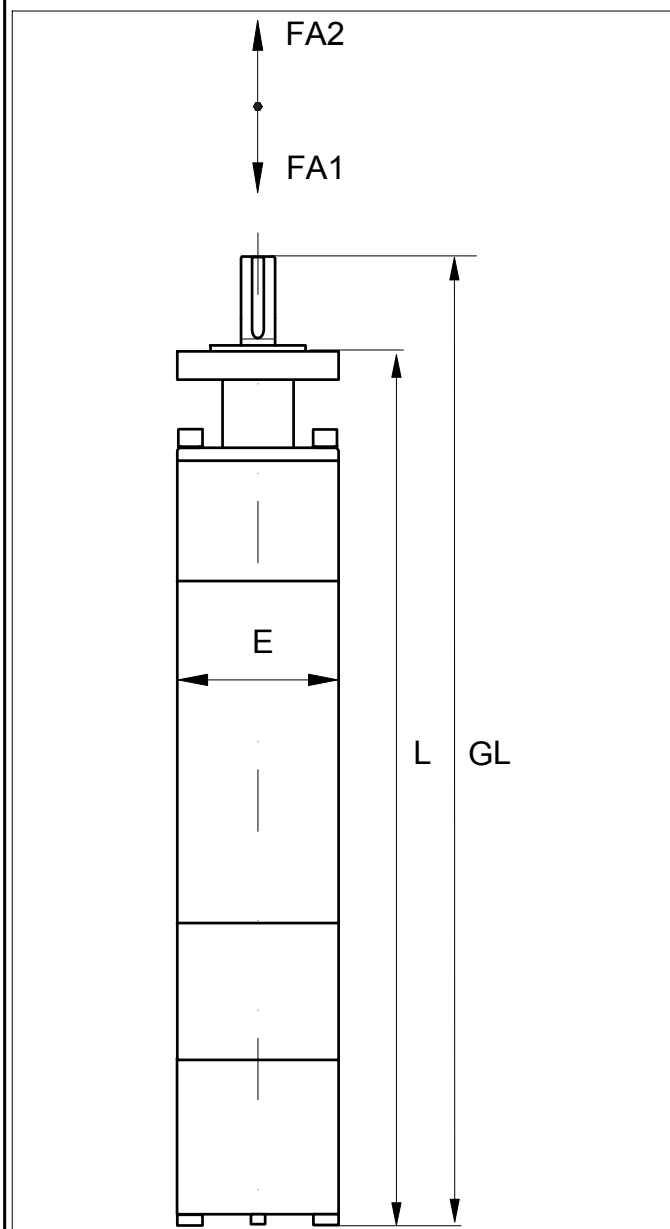

Name	Value
E	240
FA1	60 kN
FA2	1,4 kN
GL	2183
L	2204

